



**Automotive & Powersports
THE FACTS ABOUT
YOUR INTAKE & AIR**

ISO 5011 Tested to Make Sure You Maximize Airflow While Still Protecting Your Engine.

Part Number: 75-5101, 75-5101D
Description: Performance Intake Kit & Filter
Vehicle Applications: 2001-2004 Chevy / GMC Duramax LB7 6.6L

Test Date: 02/08/17
Test Report #: 3, 4, 5, 6, 7, 8, 9, 10

TECHNICAL BULLETIN

There is a lot of misinformation in the marketplace. S&B publishes specific test results for each of our intakes & filters as shown below, so you can make an informed decision. Remember, improving your airflow is only good if your engine is still protected. That's the S&B difference!

FACT: S&B Flows 44.63% Better than Stock

In tests performed in our climate controlled laboratory according to the ISO5011 Test Standard, S&B's intake kit (and filter) had significantly lower restriction (better airflow) than the stock intake system. See the graph on the next page.

WATCH OUT: Some competitors over state airflow.

If they state that their filter will flow, lets say 1000 cfm, without stating at what restriction level, they are trying to mislead you.

| Description | % S&B Flowed Better than Stock (tested @ 632 cfm) |
|--------------------------------------------------------------|------------------------------------------------------|
| S&B Intake w/ Cleanable Filter (Secondary Inlet - Open) | 44.63% |
| S&B Intake w/ Cleanable Filter (Secondary Inlet - Closed) | 41.15% |
| S&B Intake w/ Dry Filter (Secondary Inlet - Open) | 42.35% |
| S&B Intake w/ Dry Filter (Secondary Inlet - Closed) | 39.32% |

TEST CONDITIONS

| | |
|----------------------------------|------------|
| Barometric Pressure | 28.98 |
| Airflow Setpoint | 632 cfm |
| Relative Humidity | 50 |
| Temperature | 70.2F |
| Type of Dust | ISO Coarse |
| Batch # | 13099C |
| Dust Feed Rate (grams/minute) | 17.90 |


FACT: S&B Protects Your Engine

S&B tests at the highest rated CFM for your vehicle when determining the efficiency rate (amount of dust the filter stops), so that we can be sure that your engine will be protected.

| Description | Efficiency Rate (tested @ 632 cfm) |
|-----------------------------------|---------------------------------------|
| Stock | 99.13% |
| S&B Intake w/ Cleanable Filter | 99.25% |
| S&B Intake w/ Dry Filter | 99.74% |

WATCH OUT: Some Competitors Use the Same Efficiency Rates for Multiple Part Numbers.

Many send one filter off to a lab to be tested at a low cfm and then publish this efficiency rate for all of their part numbers.

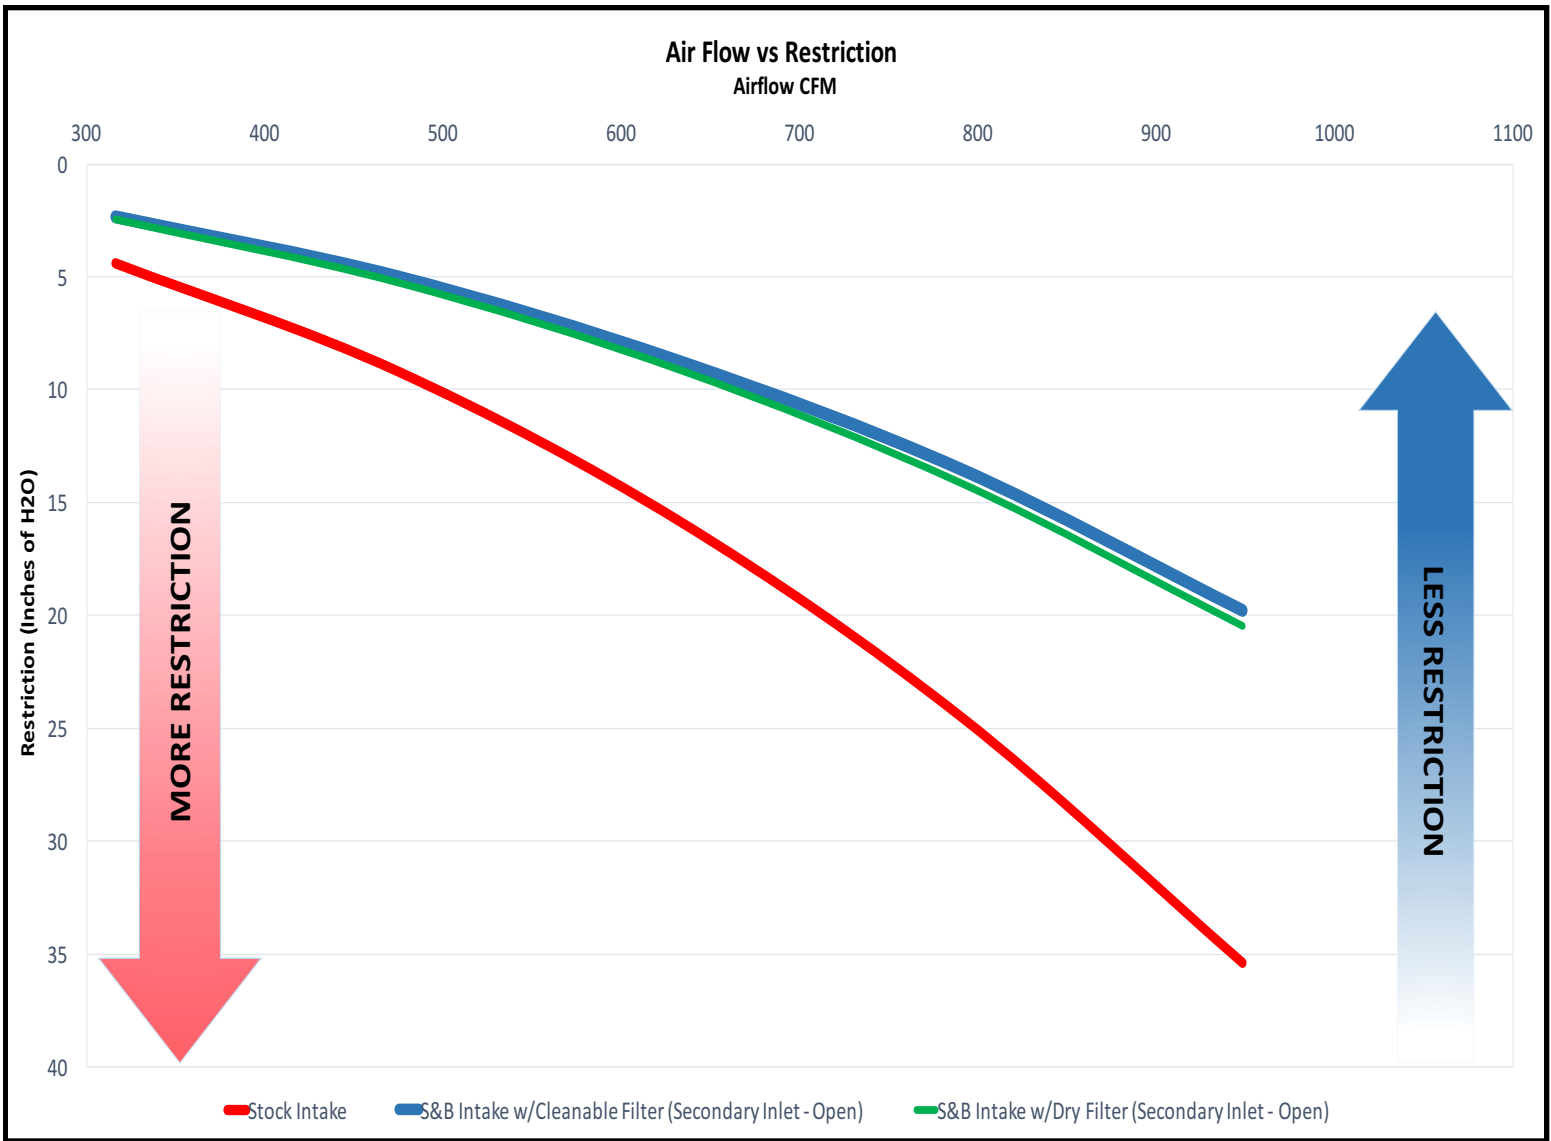

Air Filter Restriction Test Report

Test #: 435
Sample #: 3
Filter #: A1618C
Housing #:
Date Code:

Operator: SD
Report Date: 2/8/2017
Filter Mfg.:
Housing Mfg.:




Test Description: STOCK INTAKE AND FILTER, NO FILTER MINDER, NO SENSORS, RESONATOR INSTALLED, ACDELCO A1618C

Test Conditions

Barometric Pressure: 28.87979 in. Hg
Air Flow Type: SCFM
Number of Pleats:
Flow Direction:

Relative Humidity: 49 %
Temperature: 69 deg. F
Pleat Depth: in.

Air Flow Curve

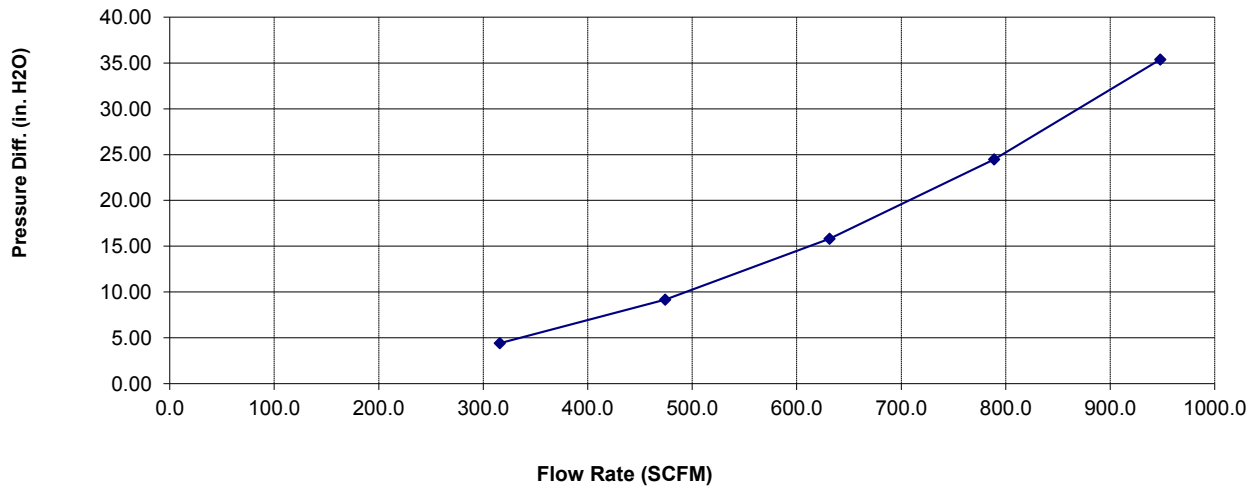

Air Flow Curve Data

| <u>Flow Rate</u> | <u>Differential Pressure</u> |
|------------------|------------------------------|
| 316 | 4.42 |
| 474 | 9.19 |
| 631 | 15.82 |
| 789 | 24.48 |
| 948 | 35.38 |

Air Filter Restriction Test Report

Test #: 435
Sample #: 5
Filter #: KF-1035
Housing #:
Date Code:

Operator: SD
Report Date: 2/8/2017
Filter Mfg.:
Housing Mfg.:




Test Description: 75-5101 PRODUCTION KIT, NO SENSORS, NO FILTER MINDER, LID INSTALLED, FENDER SEAL INSTALLED
PLUG INSTALLED, KF-1035

Test Conditions

Barometric Pressure: 28.89617 in. Hg
Air Flow Type: SCFM
Number of Pleats:
Flow Direction:

Relative Humidity: 49 %
Temperature: 68 deg. F
Pleat Depth: in.

Air Flow Curve

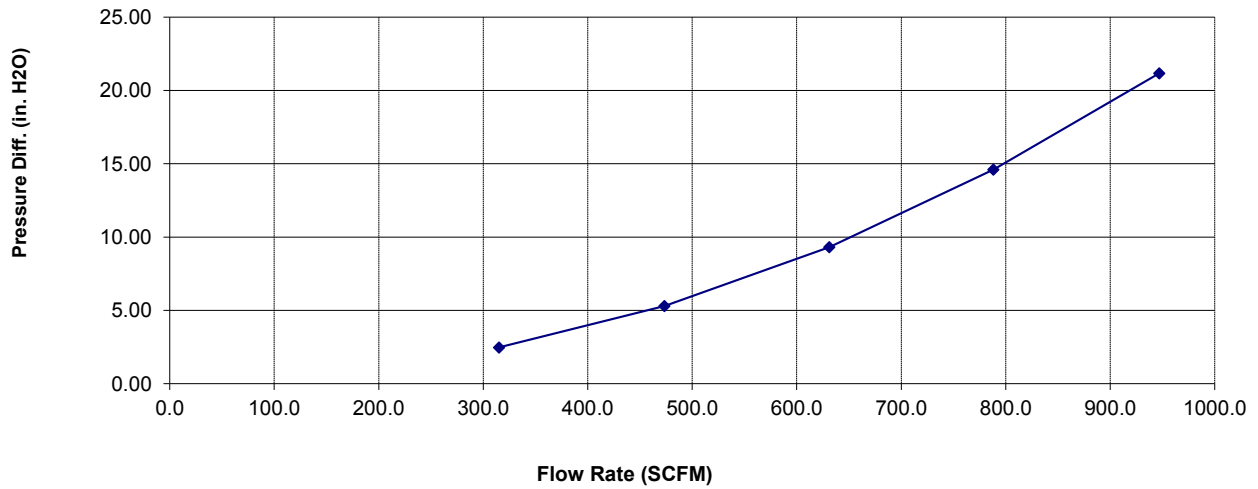

Air Flow Curve Data

| <u>Flow Rate</u> | <u>Differential Pressure</u> |
|------------------|------------------------------|
| 315 | 2.48 |
| 474 | 5.29 |
| 631 | 9.31 |
| 788 | 14.60 |
| 947 | 21.17 |

Air Filter Restriction Test Report

Test #: 435
Sample #: 6
Filter #: KF-1035
Housing #: 75-5101
Date Code:

Operator: SD
Report Date: 2/8/2017
Filter Mfg.:
Housing Mfg.:




Test Description: 75-5101 PRODUCTION KIT, NO SENSORS, NO FILTER MINDER, LID INSTALLED, FENDER SEAL INSTALLED
PLUG REMOVED, KF-1035

Test Conditions

Barometric Pressure: 28.9006 in. Hg
Air Flow Type: SCFM
Number of Pleats:
Flow Direction:

Relative Humidity: 49 %
Temperature: 68 deg. F
Pleat Depth: in.

Air Flow Curve

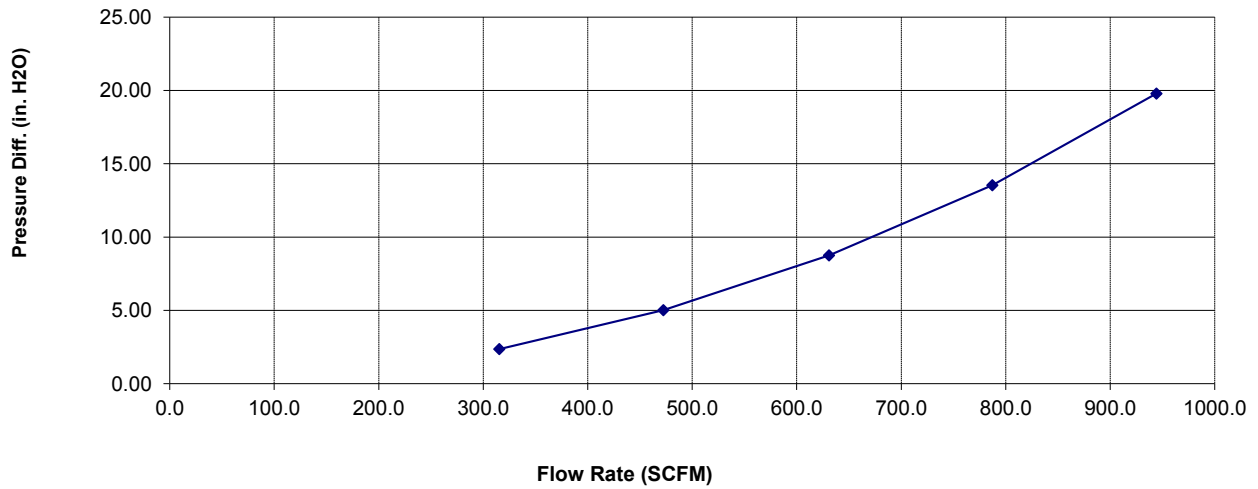

Air Flow Curve Data

| <u>Flow Rate</u> | <u>Differential Pressure</u> |
|------------------|------------------------------|
| 315 | 2.36 |
| 472 | 5.01 |
| 631 | 8.76 |
| 787 | 13.54 |
| 944 | 19.80 |

Air Filter Restriction Test Report

Test #: 435
Sample #: 7
Filter #: KF-1035D
Housing #: 75-5101
Date Code:

Operator: SD
Report Date: 2/8/2017
Filter Mfg.:
Housing Mfg.:




Test Description: 75-5101 PRODUCTION KIT, NO SENSORS, NO FILTER MINDER, LID INSTALLED, FENDER SEAL INSTALLED
PLUG REMOVED, KF-1035D

Test Conditions

Barometric Pressure: 28.98047 in. Hg
Air Flow Type: SCFM
Number of Pleats:
Flow Direction:

Relative Humidity: 49 %
Temperature: 68 deg. F
Pleat Depth: in.

Air Flow Curve

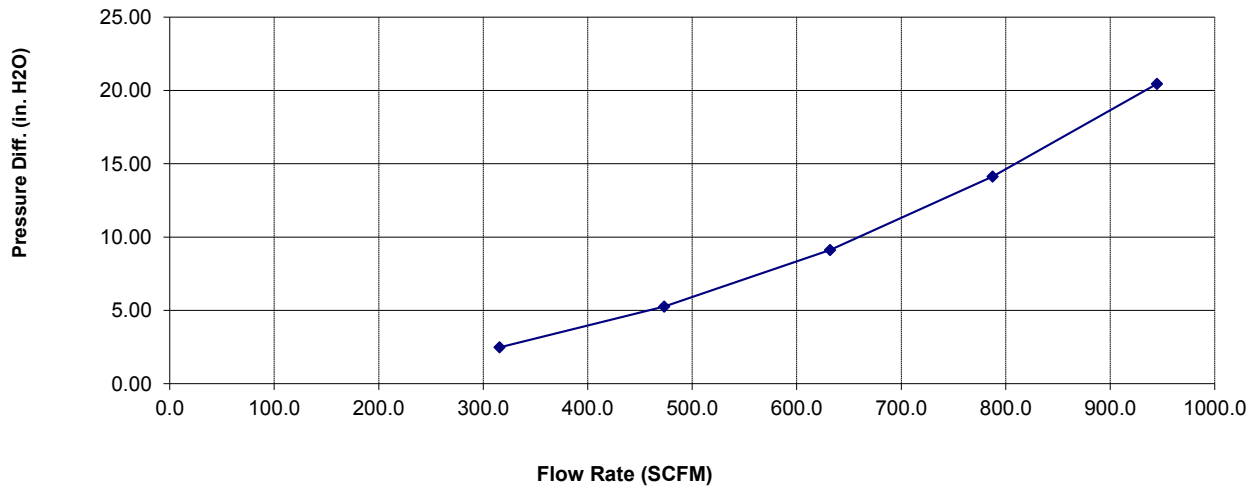

Air Flow Curve Data

| <u>Flow Rate</u> | <u>Differential Pressure</u> |
|------------------|------------------------------|
| 316 | 2.48 |
| 473 | 5.26 |
| 632 | 9.12 |
| 788 | 14.13 |
| 945 | 20.45 |

Air Filter Restriction Test Report

Test #: 435
Sample #: 8
Filter #: KF-1035D
Housing #: 75-5101
Date Code:

Operator: SD
Report Date: 2/8/2017
Filter Mfg.:
Housing Mfg.:




Test Description: 75-5101 PRODUCTION KIT, NO SENSORS, NO FILTER MINDER, LID INSTALLED, FENDER SEAL PLUG INSTALLED, KF-1035D

Test Conditions

Barometric Pressure: 28.97469 in. Hg
Air Flow Type: SCFM
Number of Pleats:
Flow Direction:

Relative Humidity: 48 %
Temperature: 69 deg. F
Pleat Depth: in.

Air Flow Curve

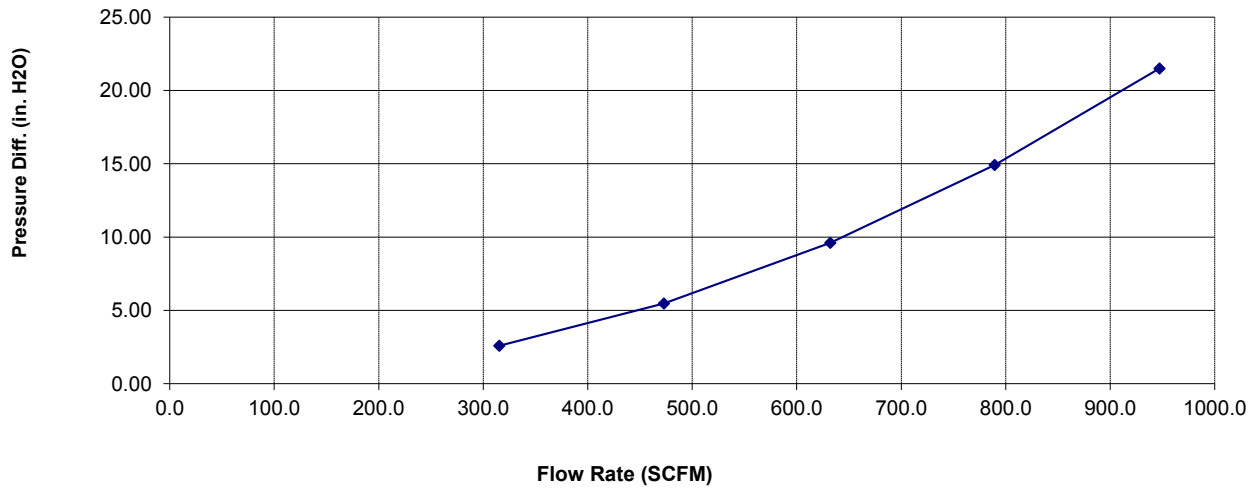

Air Flow Curve Data

| <u>Flow Rate</u> | <u>Differential Pressure</u> |
|------------------|------------------------------|
| 315 | 2.59 |
| 473 | 5.47 |
| 632 | 9.60 |
| 790 | 14.93 |
| 947 | 21.51 |

Air Filter Full Life Efficiency Test Report

Test #: 435
Sample #: 4
Filter #: A1618C
Housing #:
Date Code:

Operator: SD
Report Date: 2/8/2017
Filter Mfg.:
Housing Mfg.:




Test Description: STOCK INTAKE AND FILTER, NO FILTER MINDER, NO SENSORS, RESONATOR INSTALLED, ACDELCO A1618C

| Test Conditions | | | |
|-----------------------------|---------------|-------------------------------|------------|
| Barometric Pressure: | 28.885 in. Hg | Relative Humidity: | 48 % |
| Air Flow Setpoint: | 632 SCFM | Type of Dust: | A4 COARSE |
| Test Procedure: | | Batch #: | 13228C |
| Air Flow Type: | SCFM | Temperature: | 69 deg. F |
| Test Endpoint: | 10 in. H2O | Initial Add Rate: | NaN g/min |
| Number of Pleats: | | Accumulative Add Rate: | 17.9 g/min |
| Flow Direction: | | Pleat Depth: | in. |

| Test Results | | | |
|------------------------|---------------|-------------------------------|-----------|
| Initial Delta P | 15.78 in. H2O | Accumulative Capacity: | 374.20 g |
| | | Test Time: | 21.13 min |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

| | Initial | | Accumulative | |
|------------|---------|---------|--------------|---------|
| | | Blanket | | Blanket |
| Start | | | 3853.90 | 148.26 |
| End | | | 4228.10 | 151.53 |
| Gain | | | 374.20 | 3.27 |
| Efficiency | | | 99.13% | |

- Standard Restriction
- Pressure Differential

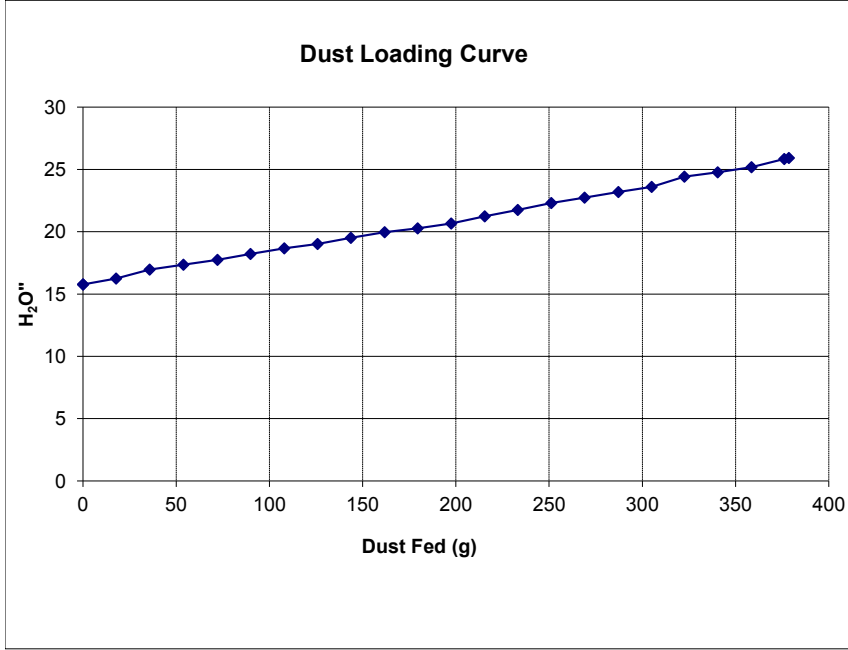

| Dust Loading Curve Data | |
|-------------------------|-----------------------------|
| Dust Fed (g) | Pressure (H ₂ O) |
| 0 | 15.77 |
| 17.73 | 16.244 |
| 35.805 | 16.956 |
| 53.925 | 17.345 |
| 72.19 | 17.752 |
| 89.868 | 18.208 |
| 107.95 | 18.673 |
| 125.767 | 19.021 |
| 143.65 | 19.513 |
| 161.807 | 19.957 |
| 179.509 | 20.274 |
| 197.508 | 20.658 |
| 215.484 | 21.228 |
| 233.155 | 21.757 |
| 251.128 | 22.309 |
| 268.972 | 22.733 |
| 287.108 | 23.189 |
| 304.977 | 23.602 |
| 322.566 | 24.417 |
| 340.443 | 24.77 |
| 358.479 | 25.179 |
| 376.161 | 25.829 |
| 378.609 | 25.917 |















DANGER
...
PELIGRO
...

Precision II



DANGER
PELIGRO

Precision II



